







# MICRONOZZLE SYSTEM

**Patent number:** WO0151208  
**Publication date:** 2001-07-19  
**Inventor:** KINKOPF THOMAS (DE); BEUTEL HANSJOERG (DE)  
**Applicant:** FRAUNHOFER GES FORSCHUNG (DE); KINKOPF THOMAS (DE); BEUTEL HANSJOERG (DE)  
**Classification:**  
- **international:** **B01L3/00; B01L3/02; G01N35/10; B01L3/00; B01L3/02; G01N35/10; (IPC1-7): B01L3/02; B01L3/00**  
- **european:** B01L3/00C6M; B01L3/02C; B01L3/02D  
**Application number:** WO2000EP11689 20001123  
**Priority number(s):** DE20001000691 20000110

**Also published as:**

 DE10000691 (A)


**Cited documents:**

 DE19911456  
 EP0434149  
 US5877580  
 US5904424  
 EP0725267  
more >>

[Report a data error here](#)

## Abstract of WO0151208

The invention relates to a micronozzle system comprising at least one nozzle body (3) which encompasses a nozzle opening (4) that has a nozzle-opening cross-section in the micrometer range, through which a gaseous or liquid stream of a substance can be introduced or discharged. The invention is characterised in that the nozzle body (3) delimits an area into which at least one end of a hollow channel (1) opens and that another end of said hollow channel is linked to a connection area, to which a pressure source for transporting the stream of a substance through the hollow channel (1) can be attached.

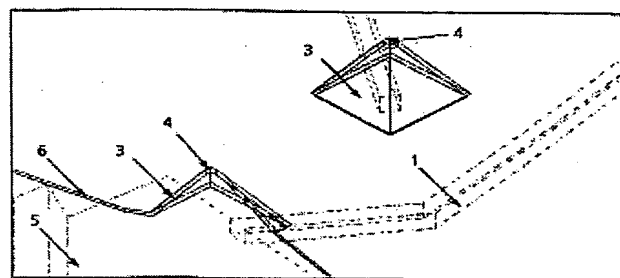

Data supplied from the **esp@cenet** database - Worldwide